


FPC/FCC Insert Direction
 Recommended P.C.B Layout
 PCB OTHERS TOLERANCES±0.05

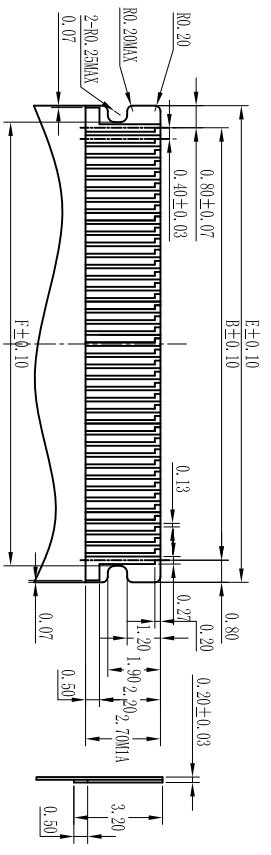

- Note:
- Material
 - 1.1: Housing: Thermoplastic,High temp. UL94-V0;
 - 1.2: Actuator: Thermoplastic,High temp. UL94-V0;
 - 1.3: Contact: Phosphor Bronze;
 - 1.4: LEG: Phosphor Bronze;
 - Plating
 - 2.1: Contact: Matte Tin Or Gold Plating Nickel Overall ;
 - 2.2: LEG: Matte Tin Plating Over Nickel.

4	4.2	1.2	3.06	3.6	2.3	1.61
5	4.6	1.6	3.46	4	3.2	2.01
6	5	2	3.86	4.4	3.5	2.41
7	5.4	2.4	4.26	4.8	4	2.81
8	5.8	2.8	4.66	5.2	4.4	3.21
9	6.2	3.2	5.06	5.6	4.8	3.61
10	6.6	3.6	5.46	6	5.2	4.01
11	7	4	5.86	6.4	5.6	4.41
12	7.4	4.4	6.26	6.8	6	4.81
13	7.8	4.8	6.66	7.2	6.4	5.21
14	8.2	5.2	7.06	7.6	6.8	5.61
15	8.6	5.6	7.46	8	7.2	6.01
16	9	6	7.86	8.4	7.5	6.41
17	9.4	6.4	8.26	8.8	8	6.81
18	9.8	6.8	8.66	9.2	8.4	7.21
19	10.2	7.2	9.06	9.6	8.8	7.61
20	10.6	7.6	9.46	10	9.2	8.01
21	11	8	9.86	10.4	9.5	8.41
22	11.4	8.4	10.3	10.8	10	8.81
23	11.8	8.8	10.7	11.2	10.4	9.21
24	12.2	9.2	11.1	11.6	10.8	9.61
25	12.6	9.6	11.5	12	11.2	10
26	13	10	11.9	12.4	11.6	10.4
27	13.4	10.4	12.3	12.8	12	10.8
28	13.8	10.8	12.7	13.2	12.4	11.2
29	14.2	11.2	13.1	13.6	12.8	11.6
30	14.6	11.6	13.5	14	13.2	12
31	15	12	13.9	14.4	13.6	12.4

32	15.4	12.4	14.3	14.8	14	12.8
33	15.8	12.8	14.7	15.2	14.4	13.2
34	16.2	13.2	15.1	15.6	14.8	13.6
35	16.6	13.6	15.5	16	15.2	14
36	17	14	15.9	16.4	15.6	14.4
37	17.4	14.4	16.3	16.8	16	14.8
38	17.8	14.8	16.7	17.2	16.4	15.2
39	18.2	15.2	17.1	17.6	16.8	15.6
40	18.6	15.6	17.5	18	17.2	16
41	19	16	17.9	18.4	17.6	16.4
42	19.4	16.4	18.3	18.8	18	16.8
43	19.8	16.8	18.7	19.2	18.4	17.2
44	20.2	17.2	19.1	19.6	18.8	17.6
45	20.6	17.6	19.5	20	19.2	18
46	21	18	19.9	20.4	19.6	18.4
47	21.4	18.4	20.3	20.8	20	18.8
48	21.8	18.8	20.7	21.2	20.4	19.2
49	22.2	19.2	21.1	21.6	20.8	19.6
50	22.6	19.6	21.5	22	21.2	20
51	23	20	21.9	22.4	21.6	20.4
52	23.4	20.4	22.3	22.8	22	20.8
53	23.8	20.8	22.7	23.2	22.4	21.2
54	24.2	21.2	23.1	23.6	22.8	21.6
55	24.6	21.6	23.5	24	23.2	22
56	25	22	23.9	24.4	23.6	22.4
57	25.4	22.4	24.3	24.8	24	22.8
58	25.8	22.8	24.7	25.2	24.4	23.2
59	26.2	23.2	25.1	25.6	24.8	23.6
60	26.6	23.6	25.5	26	25.2	24

宇詮實業有限公司
 Onward Industry Co, Ltd.

UNLESS OTHERWISE SPECIFIED		ARE	400
TOLERANCES		XX	4003
		XXX	4002
		K,XXX	4030V
		ANG.	40.30V
UNIT	mm	SIZE	A4
DRAWING NO	21-803-XXXX-5	REV	A
CHECKED BY	DATE	DOCUMENT NO	
APPROVED BY	DATE	TITLE	FPC 0.4 Pitch 1.2H 掀蓋式
SHEET		SCALE	1/1
PAGE			1/1