
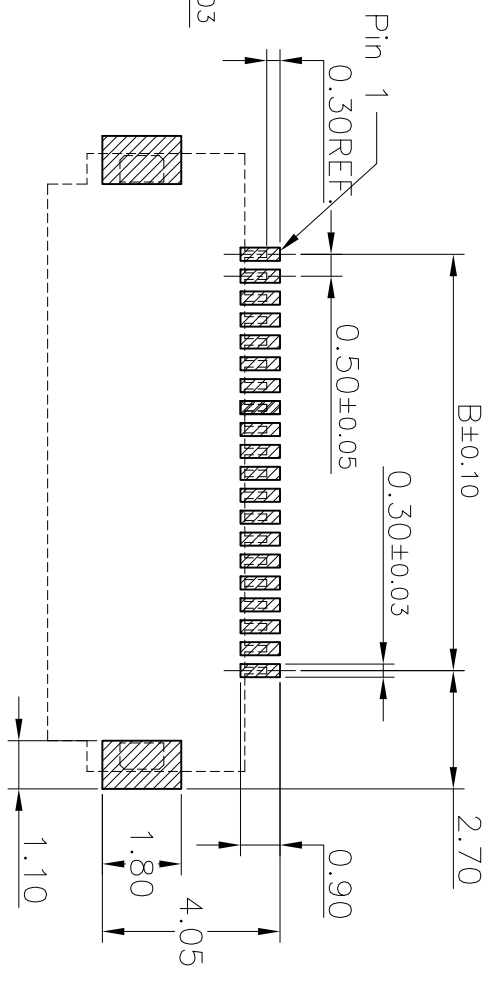
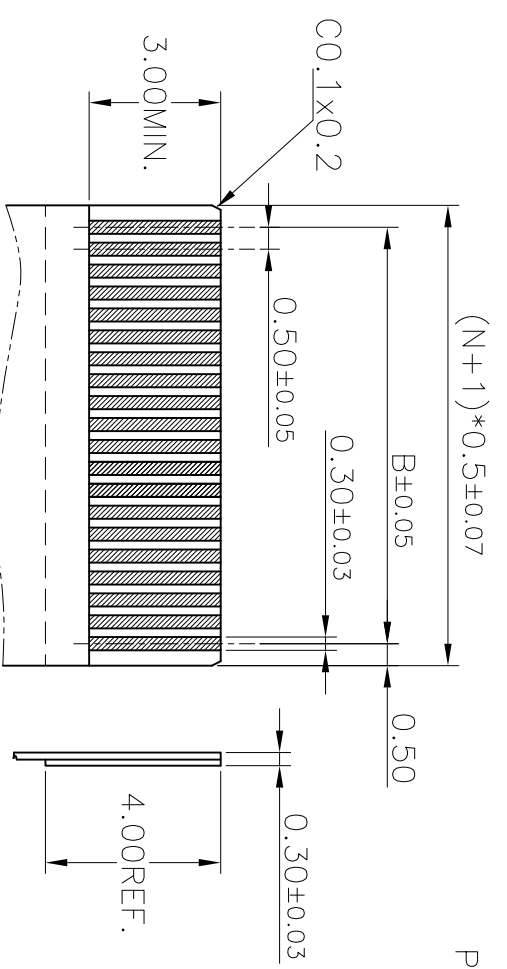
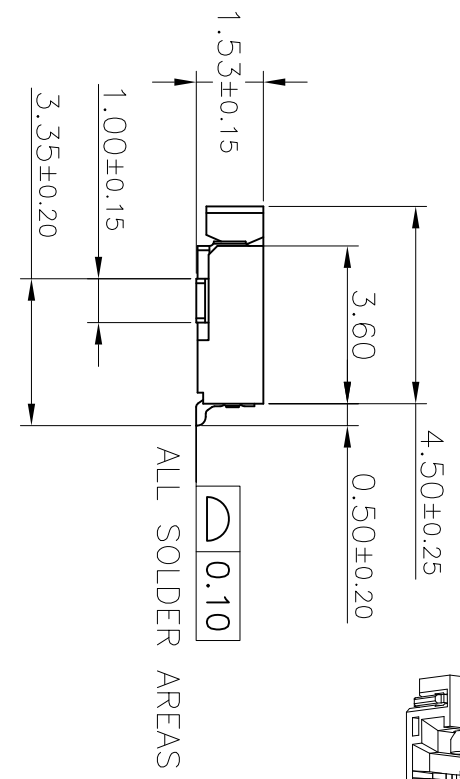
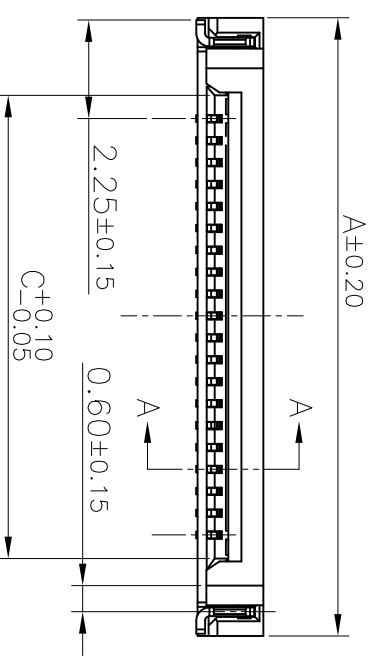


- NOTES:
1. MATERIAL:  
HOUSING: HIGH-TEMP PLASTIC, UL 94-V0 COLOR: NATURE;  
COVER: HIGH-TEMP PLASTIC, UL 94-V0, COLOR: BLACK;  
CONTACT: COPPER ALLOY;  
LEG: COPPER ALLOY;
  2. PLATING:  
CONTACT: GOLD OR TIN PLATED ON NICKEL OVERALL.  
LEG: TIN PLATED ON NICKEL OVERALL.
  3. RATING:  
CURRENT RATING: 0.5A AC/DC  
VOLTAGE RATING: 25V AC/DC  
TEMPERATURE RANGE: -25°C~+85°C;

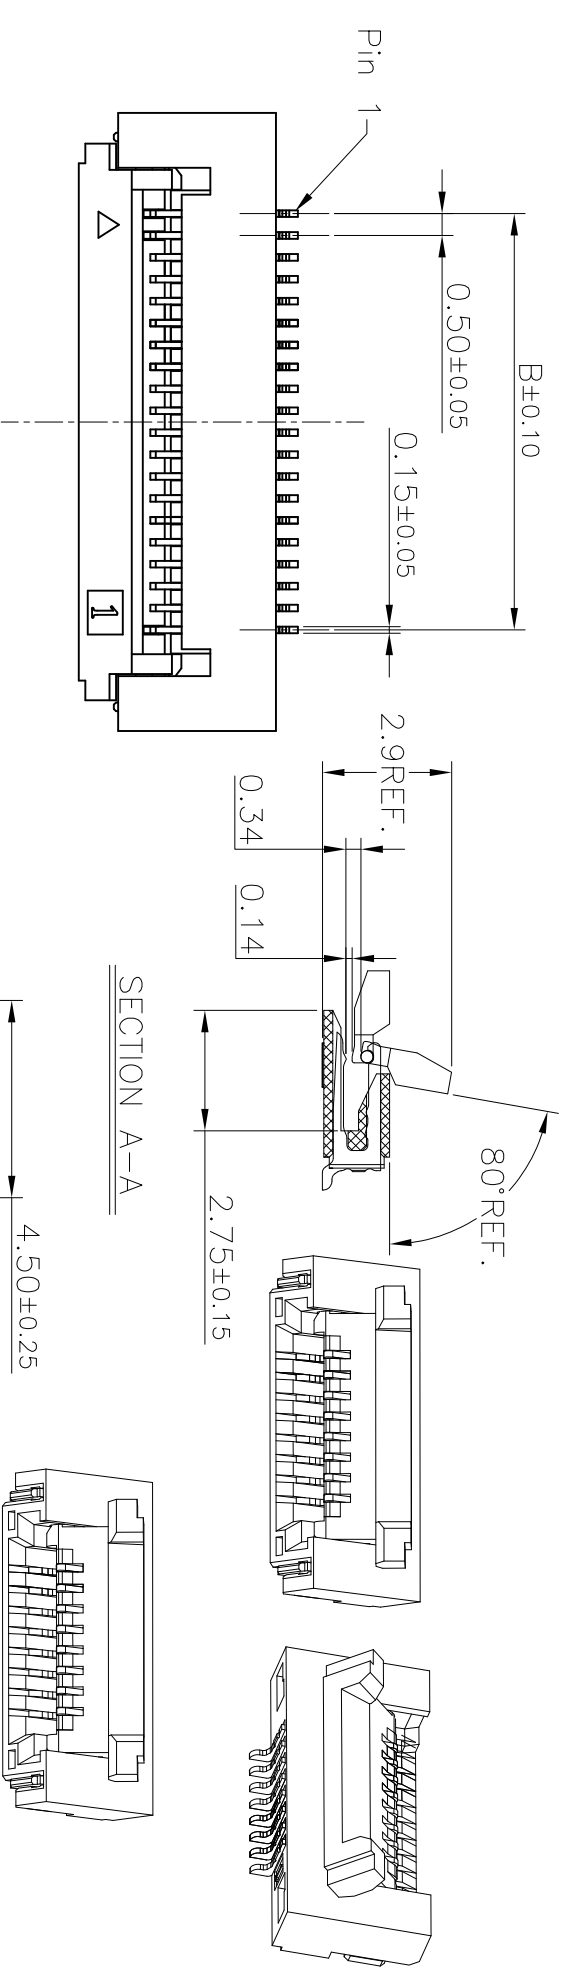

PIN NO.	DIM. A	DIM. B	DIM. C	PIN NO.	DIM. A	DIM. B	DIM. C
4	6.10	1.50	2.57	23	15.60	11.00	12.07
5	6.60	2.00	3.07	24	16.10	11.50	12.57
6	7.10	2.50	3.57	25	16.60	12.00	13.07
7	7.60	3.00	4.07	26	17.10	12.50	13.57
8	8.10	3.50	4.57	27	17.60	13.00	14.07
9	8.60	4.00	5.07	28	18.10	13.50	14.57
10	9.10	4.50	5.57	29	18.60	14.00	15.07
11	9.60	5.00	6.07	30	19.10	14.50	15.57
12	10.10	5.50	6.57	31	19.60	15.00	16.07
13	10.60	6.00	7.07	32	20.10	15.50	16.57
14	11.10	6.50	7.57	33	20.60	16.00	17.07
15	11.60	7.00	8.07	34	21.10	16.50	17.57
16	12.10	7.50	8.57	35	21.60	17.00	18.07
17	12.60	8.00	9.07	36	22.10	17.50	18.57
18	13.10	8.50	9.57	37	22.60	18.00	19.07
19	13.60	9.00	10.07	38	23.10	18.50	19.57
20	14.10	9.50	10.57	39	23.60	19.00	20.07
21	14.60	10.00	11.07	40	24.10	19.50	20.57
22	15.10	10.50	11.57	41	24.60	20.00	21.07

宇詮實業有限公司  
Onward Industry Co, Ltd.

UNLESS OTHERWISE SPECIFIED		APPROVED BY		DATE		TITLE	
TOLERANCES ARE	±0.25					FPC 0.5Pitch 1.5H	
XX	±0.15	CHECKED BY		DATE		掀蓋式 connector.	
XXX	±0.10	DRAWN BY		DATE			
XXXX	±0.30°						
ANG.							

SER	AREA	DESCRIPTION	CHK	DATE	UNIT	SIZE	DRAWING NO	REV	SHEET	SCALE
					mm	A4	21-808-XXXXX-5	A	1/1	1:1

APPLICABLE FCC  
TOLERANCE: ±0.05

RECOMMEND PCB LAYOUT  
TOLERANCE: ±0.05